
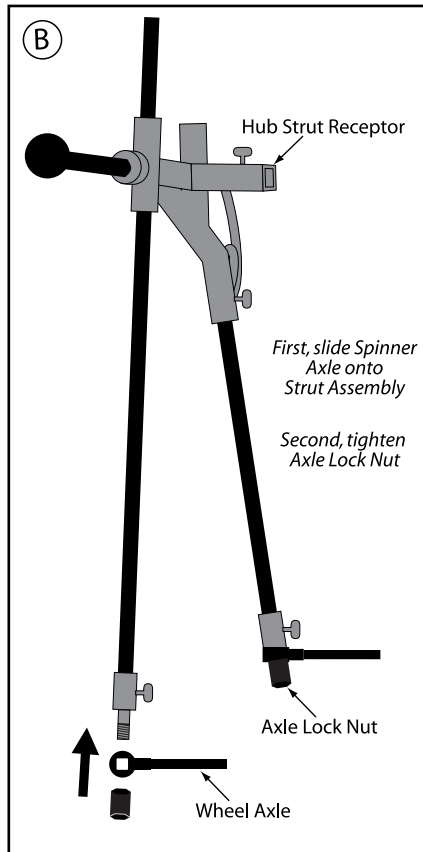


High Wheel Bike Spinner *assembly instructions*

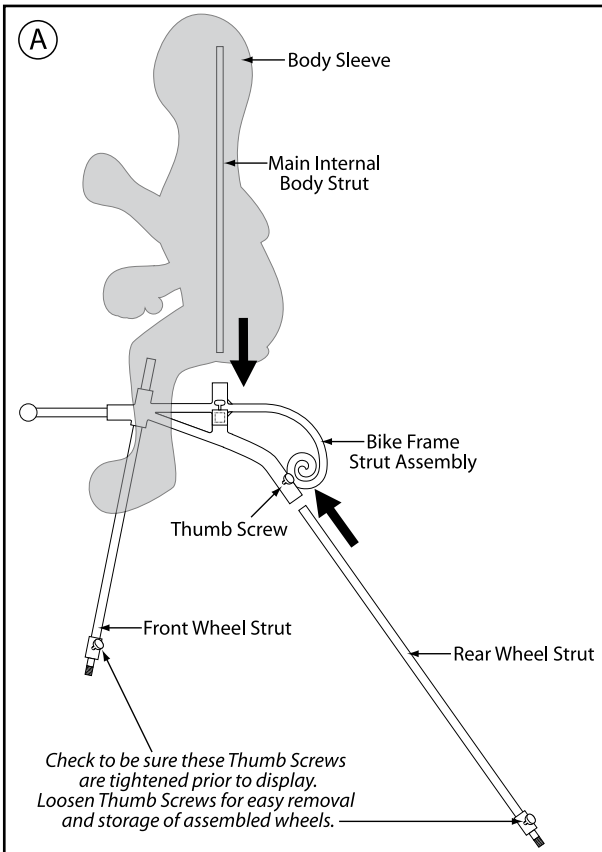

Step 1

Remove your High Wheel Bike Spinner from the package. Open the Velcro seam along the bottom of the Body Sleeve.

Step 2

Slide the Main Internal Body Strut into the Bike Frame. Slide the Rear Wheel Strut into the Bike Frame and tighten the Thumb Screw. Close Velcro Seam. Strut Assembly should match Diagram A.

Step 3

Slide the Spinner Axles onto the Wheel Struts so that the axles extend out in the same direction as the Hub Strut Receptor. Place the threaded Axle Lock Nuts on the ends of the Wheel Struts and tighten to hold the axles in place. (Diagram B)

Step 4




Slide a Washer onto each Axle. Slide the Large Wheel onto the Front Wheel Axle and the Small Wheel onto the Rear Wheel Axle. Slide another Washer onto each Axle. Tap the Axle Caps onto the ends of the Axles using a mallet or piece of wood. (Diagram C)

Step 5

Insert the Hub Strut into the Hub Strut Receptor and tighten the Thumb Screw to secure the Strut in place. (Diagram D)

Step 6

Drive Ground Stake into ground and insert the non-ferruled end of the Lower Support Pole into the Ground Stake. Insert Upper Support Pole of assembled High Wheel Bike Spinner into the ferrule. (Diagram E)

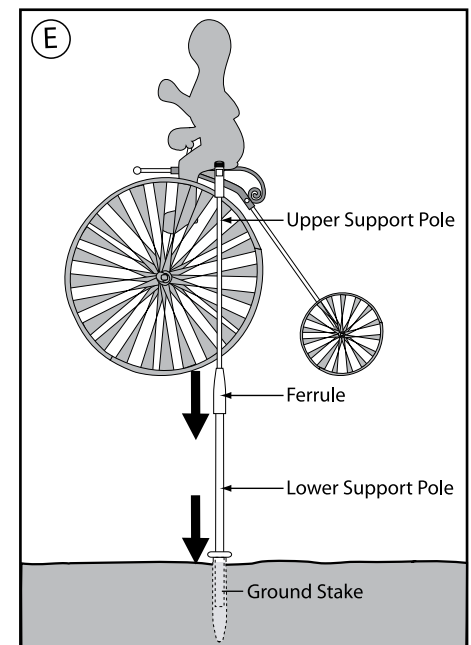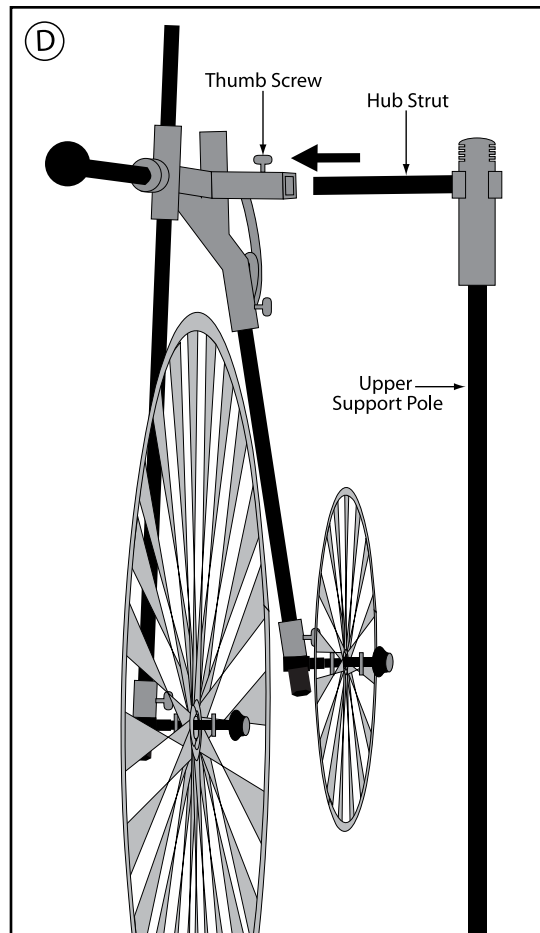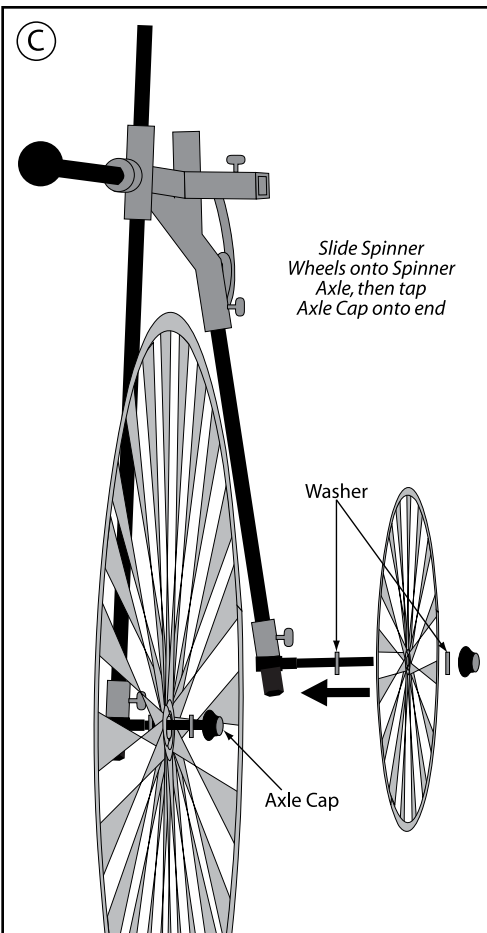

PLEASE NOTE: It is recommended that you take your High Wheel Bike Spinner inside during storms and harsh weather to preserve its durability.