

9 FT. DELTA

assembly instructions

Step 1:

Unroll kite and lay out flat facedown.

Step 2:



Slide Leading Edge Rods to bottoms of Leading Edge Sleeves.

Step 3:

Insert Spreader Rod into Pockets on Leading Edges.

Step 4:

Attach Line to Tow Point, and your 9ft. Delta is now ready to fly!

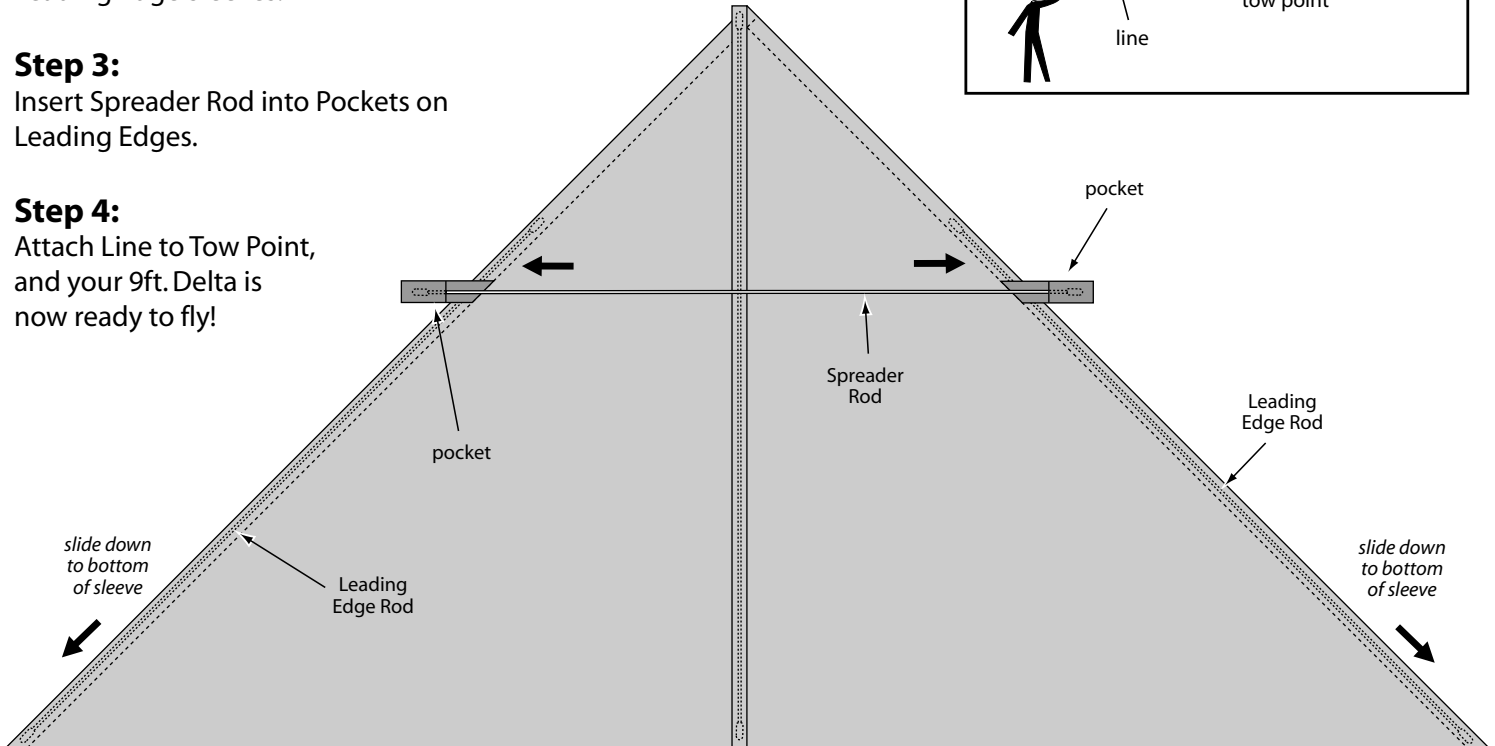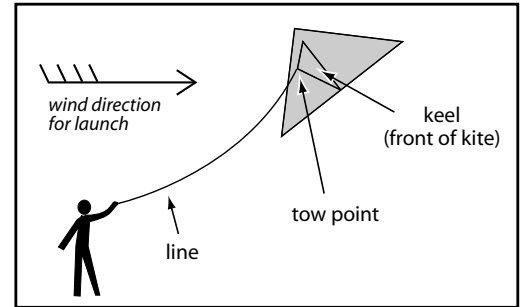

FLIGHT INSTRUCTIONS:

- Tie flying line to Tow Loop.
- Have a friend stand about 75 ft. downwind from you and hold the kite with its head pointed towards the sky.
- As the wind catches the kite, signal your friend to release it while you bring in the line with long steady pulls.
- Slowly let out more line as the kite flies upward.

RECOMMENDED LINE: 90 LB TEST LINE

OPTIMUM WIND CONDITIONS FOR 9ft. DELTA

BEAUFORT SCALE	CALM	LIGHT AIR	LIGHT BREEZE	GENTLE BREEZE	MODERATE BREEZE	FRESH BREEZE	STRONG BREEZE
WIND [M.P.H.]	0	1 2 3	4 5 6 7	8 9 10 11 12	13 14 15 16 17 18	19 20 21 22 23 24	25 26 27 28 29 30
	smoke rises vertically	Direction of wind shown by smoke, but not by wind vanes	Wind felt on face, leaves rustle, ordinary vane moves	Leaves and small twigs in constant motion; wind extends light flag	Raises dust and loose paper; small branches move	Small trees & leaves begin to sway; crested wavelets form on inland water	Large branches in motion; utility wire whistle; windows rattle
9ft. DELTA							

Note: Wind conditions aloft may vary considerably from those found near ground level.