

STRATA DELTA *assembly instructions*

Step 1:
Unfold kite making sure that the keels are on the bottom.

Horizontal Cross Struts




Step 2:
Connect the two horizontal cross struts.
(Diagram A)

Step 3:
Slide leading edge spars out to wing tips.

Step 4:
Insert the horizontal cross struts through the center sleeve and into the spar pockets on either side of the kite.
(Diagram B)

Kite is now ready to fly.

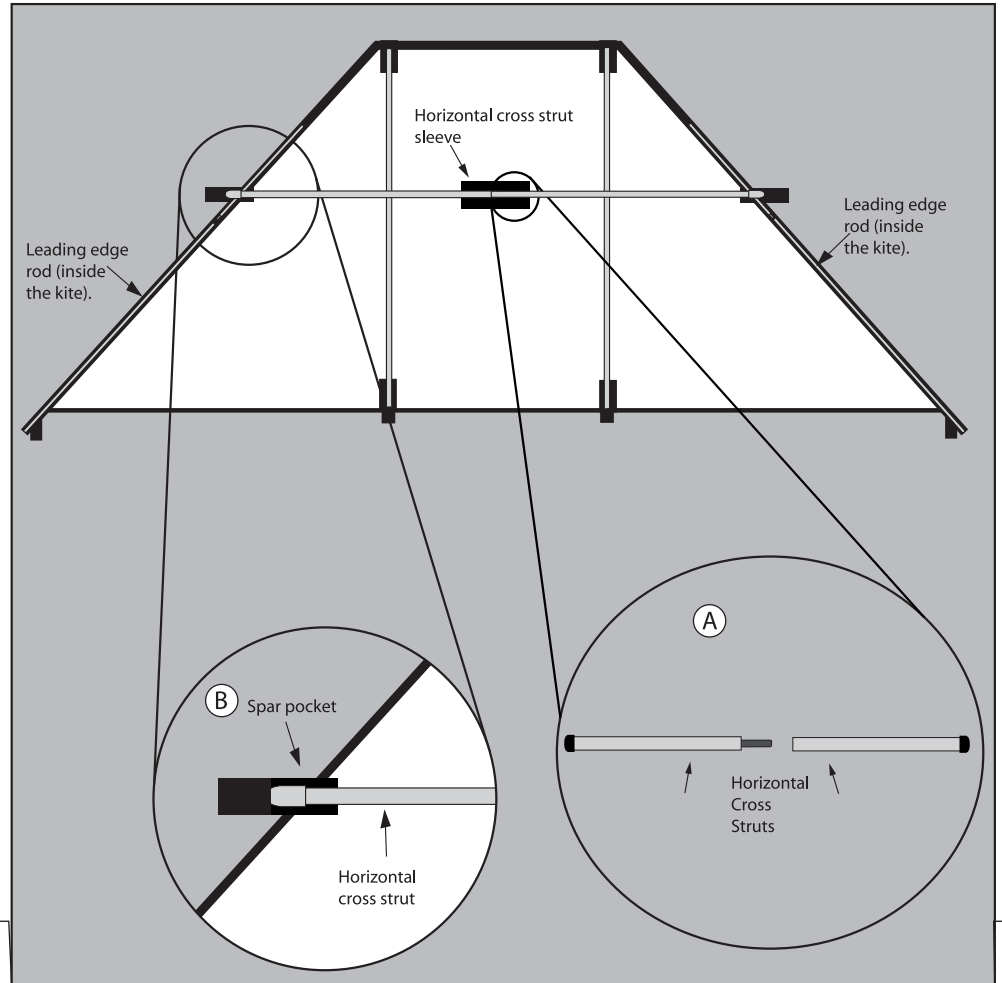

FLIGHT INSTRUCTIONS:

- Attach flying line to Tow Loop.
- Have a friend stand about 75 ft. downwind from you and hold the kite with its Leading Edge pointed towards the sky.
- As the wind catches the kite, signal your friend to release it while you bring in the line with long steady pulls.
- Slowly let out more line as the kite flies upward.

RECOMMENDED LINE: 150 LB TEST LINE

OPTIMUM WIND CONDITIONS FOR STRATA DELTA

BEAUFORT SCALE	CALM	LIGHT AIR	LIGHT BREEZE	GENTLE BREEZE	MODERATE BREEZE	FRESH BREEZE	STRONG BREEZE
[M.P.H.]	0	1-3	4-6	8-12	14-18	20-24	25-30
WIND							
				Strata Delta			

Note: Wind conditions aloft may vary considerably from those found near ground level.