


# 2-D DRAGON KITE assembly instructions


**Step 1:**  
Unroll kite and lay out flat face down.

**Step 2:**  
Insert Tail Struts into the Tubing located on the Spin and Sleeves on the tail.

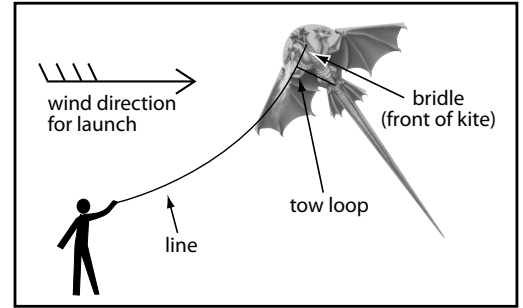

**Step 3:**  
Insert Cross Strut into the plastic Dihedral and insert opposite ends into the Leading Edge Fittings.

**Step 4:**  
Make sure Head Struts are installed in Head Strut Pockets.

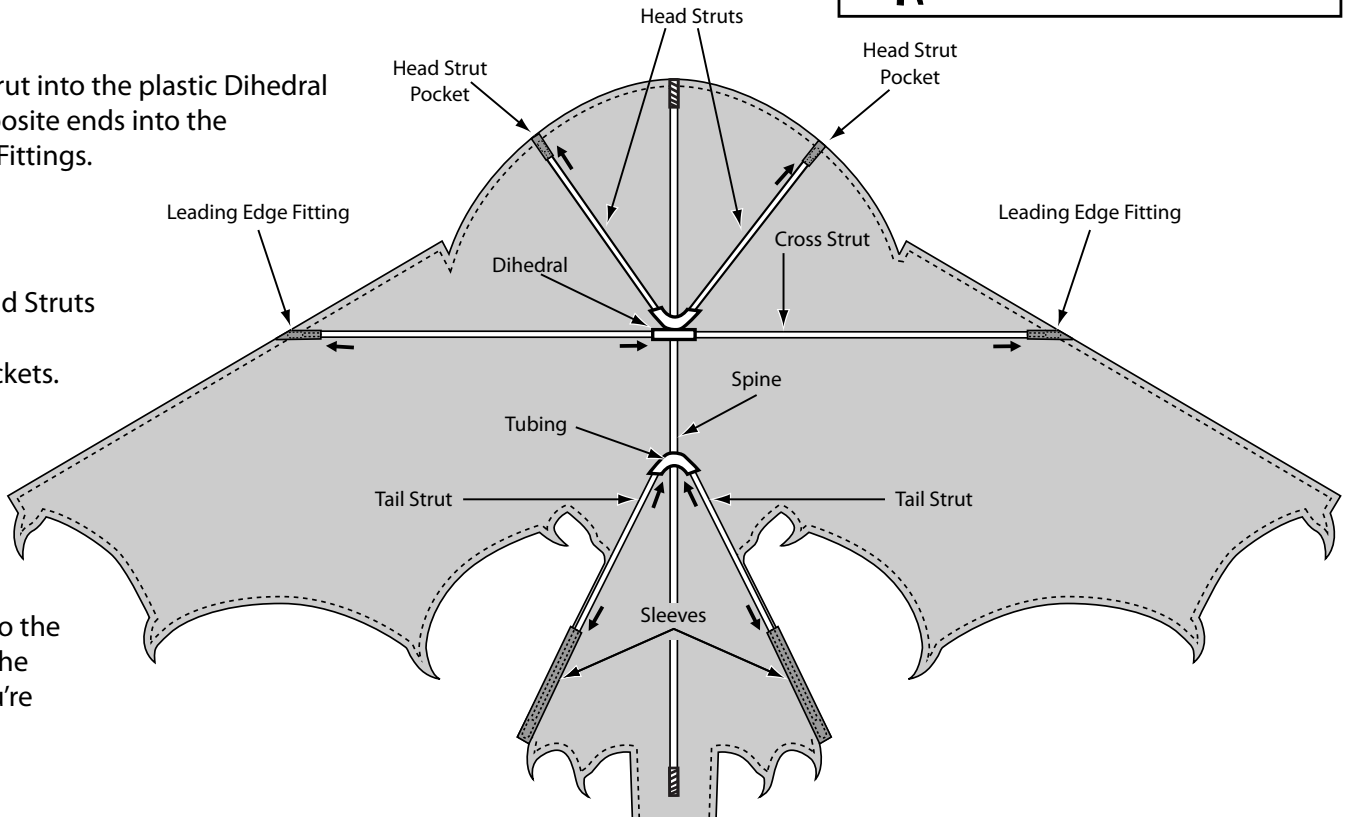

**Step 5:**  
Attach a Line to the Tow Point on the Bridle, and you're ready to fly!

## FLIGHT INSTRUCTIONS:

- Tie flying line to Tow Loop.
- Have a friend stand about 75 ft. downwind from you and hold the kite with its head pointed towards the sky.
- As the wind catches the kite, signal your friend to release it while you bring in the line with long steady pulls.
- Slowly let out more line as the kite flies upward.

RECOMMENDED LINE: 30 LB TEST LINE

## OPTIMUM WIND CONDITIONS FOR 2-D DRAGON KITE

BEAUFORT SCALE	CALM	LIGHT AIR	LIGHT BREEZE	GENTLE BREEZE	MODERATE BREEZE	FRESH BREEZE	STRONG BREEZE
WIND [M.P.H.]	0	1-3	4-6	8-12	13-18	20-24	25-30
	smoke rises vertically	Direction of wind shown by smoke, but not by wind vanes	Wind felt on face, leaves rustle, ordinary vane moves	Leaves and small twigs in constant motion; wind extends light flag	Raises dust and loose paper; small branches move	Small trees & leaves begin to sway; crested wavelets form on inland water	Large branches in motion; utility wire whistle; windows rattle
<b>2-D DRAGON KITE</b>							

Note: Wind conditions aloft may vary considerably from those found near ground level.