

# X-DELTA

assembly instructions




**Step 1:**  
Unroll Kite.

**Step 2:**  
Identify and organize struts.

**Step 3:**  
Insert the Spine into the Nose and Tail pockets. Please note that the Cross Strut should be on top of the Spine.

**Step 4:**  
Attach the flying line to the tow point on the front of the kite.

Your kite is now ready to fly!

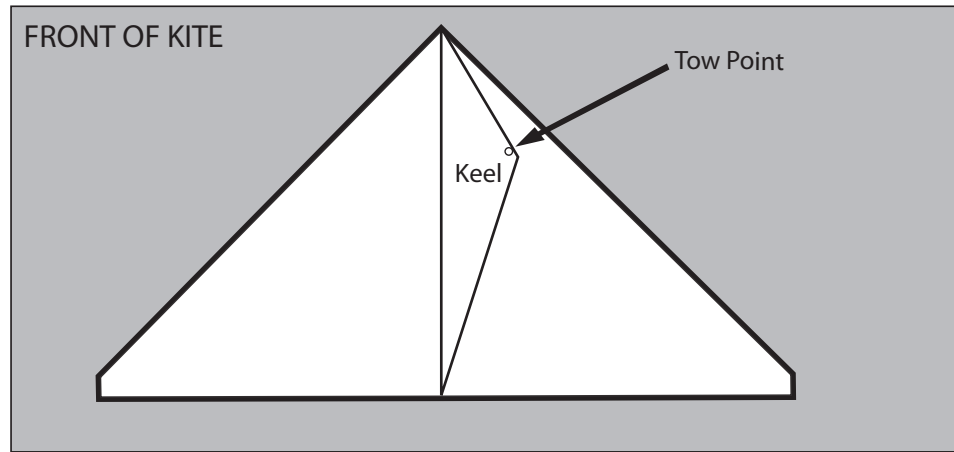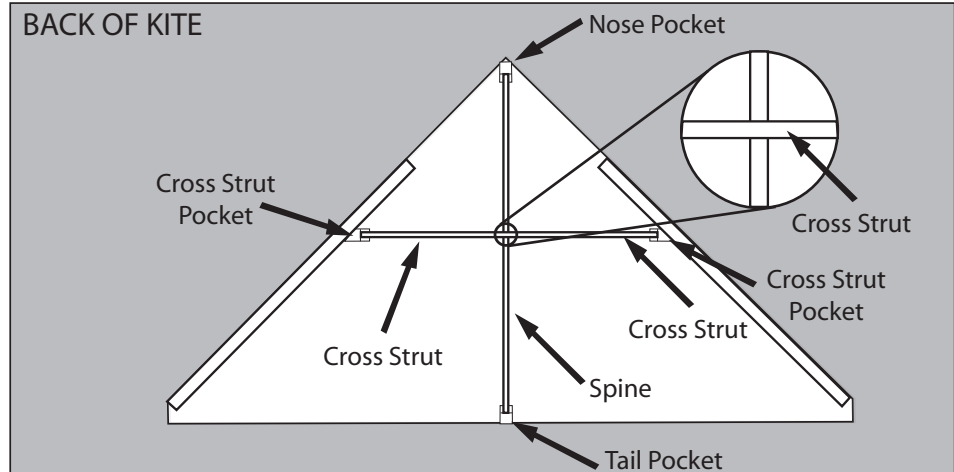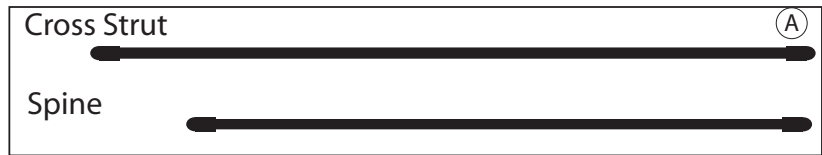

## FLIGHT INSTRUCTIONS:

- Attach flying line to Tow Loop.
- Have a friend stand about 75 ft. downwind from you and hold the kite with its Leading Edge pointed towards the sky.
- As the wind catches the kite, signal your friend to release it while you bring in the line with long steady pulls.
- Slowly let out more line as the kite flies upward.

RECOMMENDED LINE: 50 LB TEST LINE

## OPTIMUM WIND CONDITIONS FOR X-DELTA

BEAUFORT SCALE	CALM	LIGHT AIR	LIGHT BREEZE	GENTLE BREEZE	MODERATE BREEZE	FRESH BREEZE	STRONG BREEZE	
	smoke rises vertically	Direction of wind shown by smoke, but not by wind vanes	Wind felt on face, leaves rustle, ordinary vane moves	Leaves and small twigs in constant motion; wind extends light flag	Raises dust and loose paper; small branches move	Small trees & leaves begin to sway; crested wavelets form on inland water	Large branches in motion; utility wire whistle; windows rattle	
[M.P.H.]	0	1 2 3	4 5 6 7	8 9 10 11 12	13 14 15 16 17 18	19 20 21 22 23 24	25 26 27 28 29 30	
WIND								
			<b>X-Delta</b>					

Note: Wind conditions aloft may vary considerably from those found near ground level.